


# **VERTICAAL TRANSPORT NEDERLAND B.V.**

*Weg-terrein kraan  
160 ton*

# Kraan 160 TON

Vlucht tabel hoofdmast

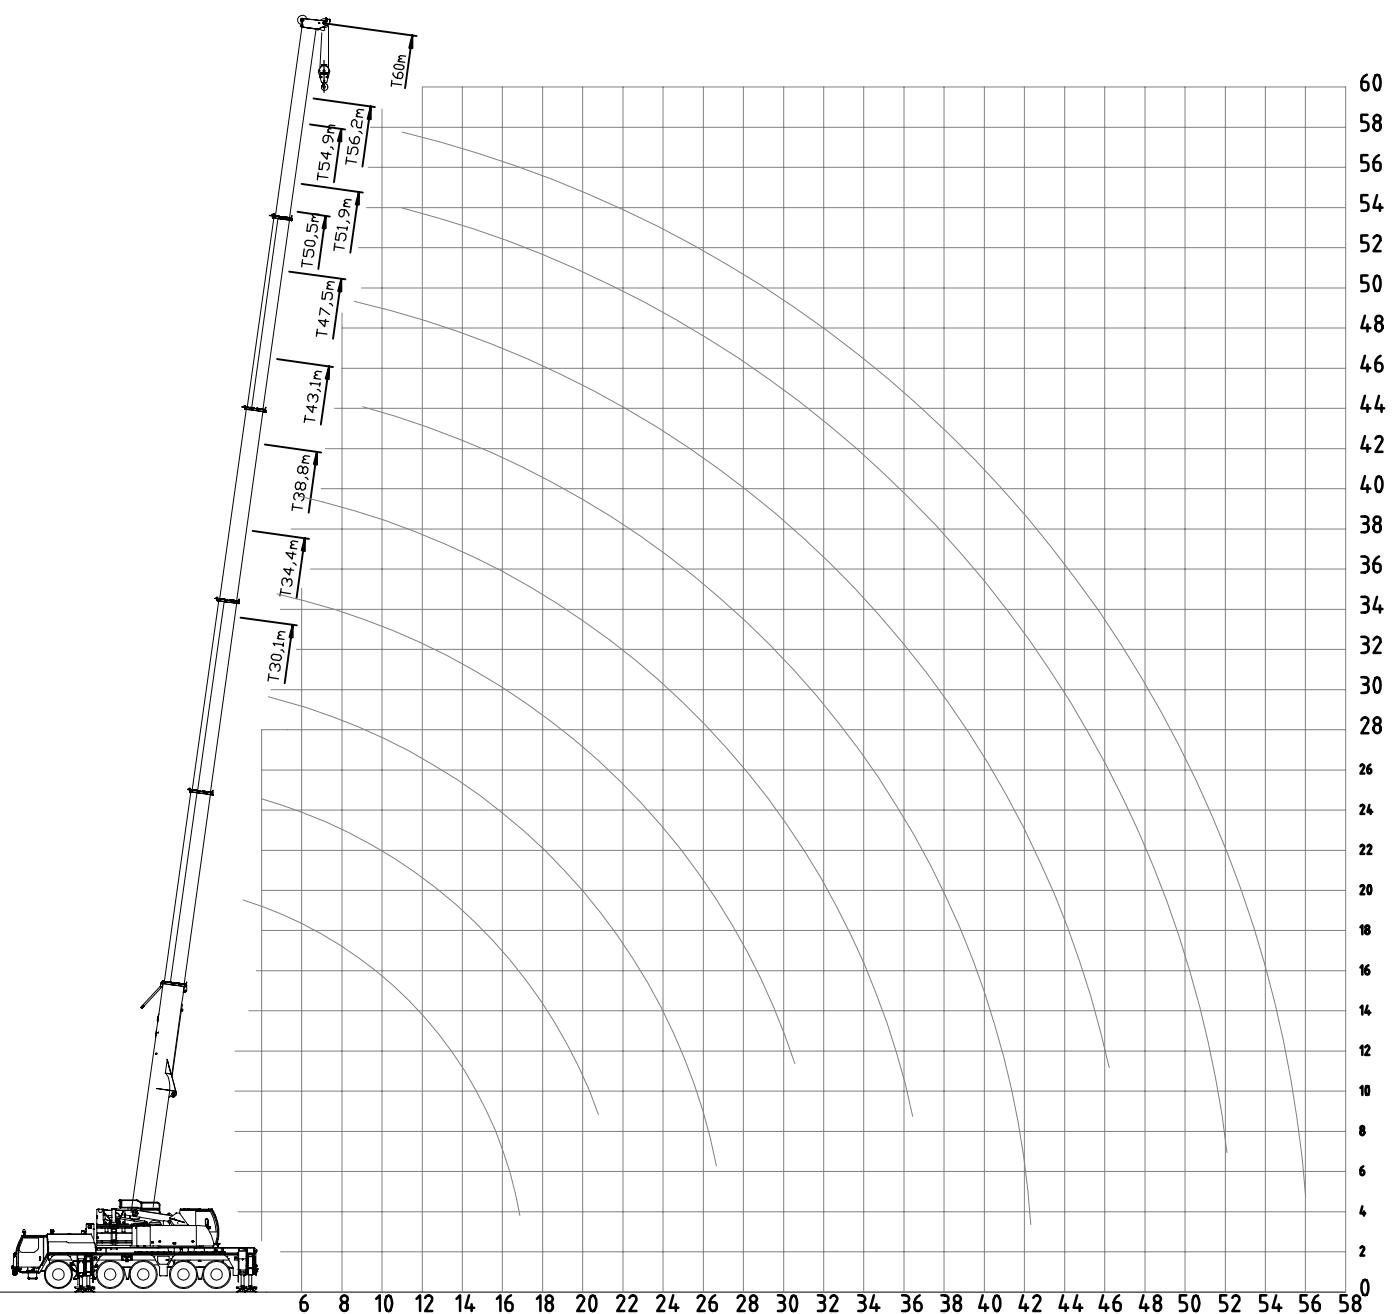

**VERTICAAL TRANSPORT  
NEDERLAND B.V.**

## HIJSTABEL - 160 TON


Kraan afgestempeld, Stempelbasis: 8.0 x 7.5 m    360° Werkbereik,  
42 ton contra-gewicht

Vlucht radius meters	Gieklengte in meters														
	12.7	17	21.4	25.7	30.1	34.4	38.8	43.1	47.5	50.5	51.9	54.9	56.2	60	
2.5	160*	82.6													
3	130*	82.6													3
3.5	92.4*	82.3	82.4	67.3											3.5
4	86*	76.7	79.5	66.3	56.1										4
4.5	80.4*	71.9	73.9	56.3	55.4										4.5
5	75.5	63.9	69.1	64.3	54.7	43.7									5
6	67.2	57.6	61.3	60.1	52.2	42.5	32.9								6
7	60.1	50.9	55.9	53.9	49.3	41	32	25.2							7
8	53.5	45.3	50.7	48.9	47	39.4	31.1	24.7	19.8						8
9	46.8	40.4	45.5	44.7	43.9	37.9	30.2	24.1	19.5	14.5	16				9
10	37.7	36.3	40.6	40.4	40.5	36.5	29.9	23.5	19.1	14.5	16	12.8	13		10
12		32.8	33	32.8	33.4	33	25.7	21.9	18.3	13.7	15.7	12.7	13	10.5	12
14		27	27.5	27.9	27.7	27.2	23	19.8	17.1	12.7	14.9	12.2	12.6	10.5	14
16			23.6	23.6	23.3	22.9	20.6	17.9	15.7	11.7	13.9	11.5	12	10.3	16
18			20.2	20.2	19.9	19.4	18.5	16.2	14.3	10.8	12.9	10.7	11.2	9.9	18
20				17.5	17.2	16.7	16.9	14.7	13	9.9	11.9	9.9	10.5	9.2	20
22				15.3	15	14.7	15	13.5	12	9.1	10.9	9.2	9.8	8.6	22
24					13.1	13.5	13.1	12.2	11	8.4	10.1	8.5	9.2	8.1	24
26					11.7	12.1	11.6	11	10.2	7.7	9.3	8	8.6	7.5	26
28						10.8	10.3	10	9.3	7.1	8.6	7.4	8	7	28
30						9.7	9.2	9.3	8.3	6.6	8	6.9	7.5	6.6	30
32						7.5	8.2	8.5	7.8	6.1	7.4	6.5	7	6.1	32
34							7.8	7.6	7.2	5.6	6.8	6	6.5	5.7	34
36							7.1	6.9	6.8	5.3	6.2	5.7	6.1	5.3	36
38								6.2	6.2	4.9	5.9	5.65.3	5.6	4.9	38
40								5.8	5.6	4.6	5.4	5	5	4.6	40
42									5.1	4.3	4.9	4.7	4.5	4.3	42
44									4.6	4	4.4	4.4	4	3.9	44
46										3.8	4	4	3.5	3.5	46
48										3.3	3.6	3.6	3.1	3.1	48
50											3.2	2.8	2.8		50
52											2.8	2.4	2.4		52
54												2.1			54
56												1.8			56

\*over achterzijde

# Kraan 160 TON

Vlucht tabel met hulpgiek

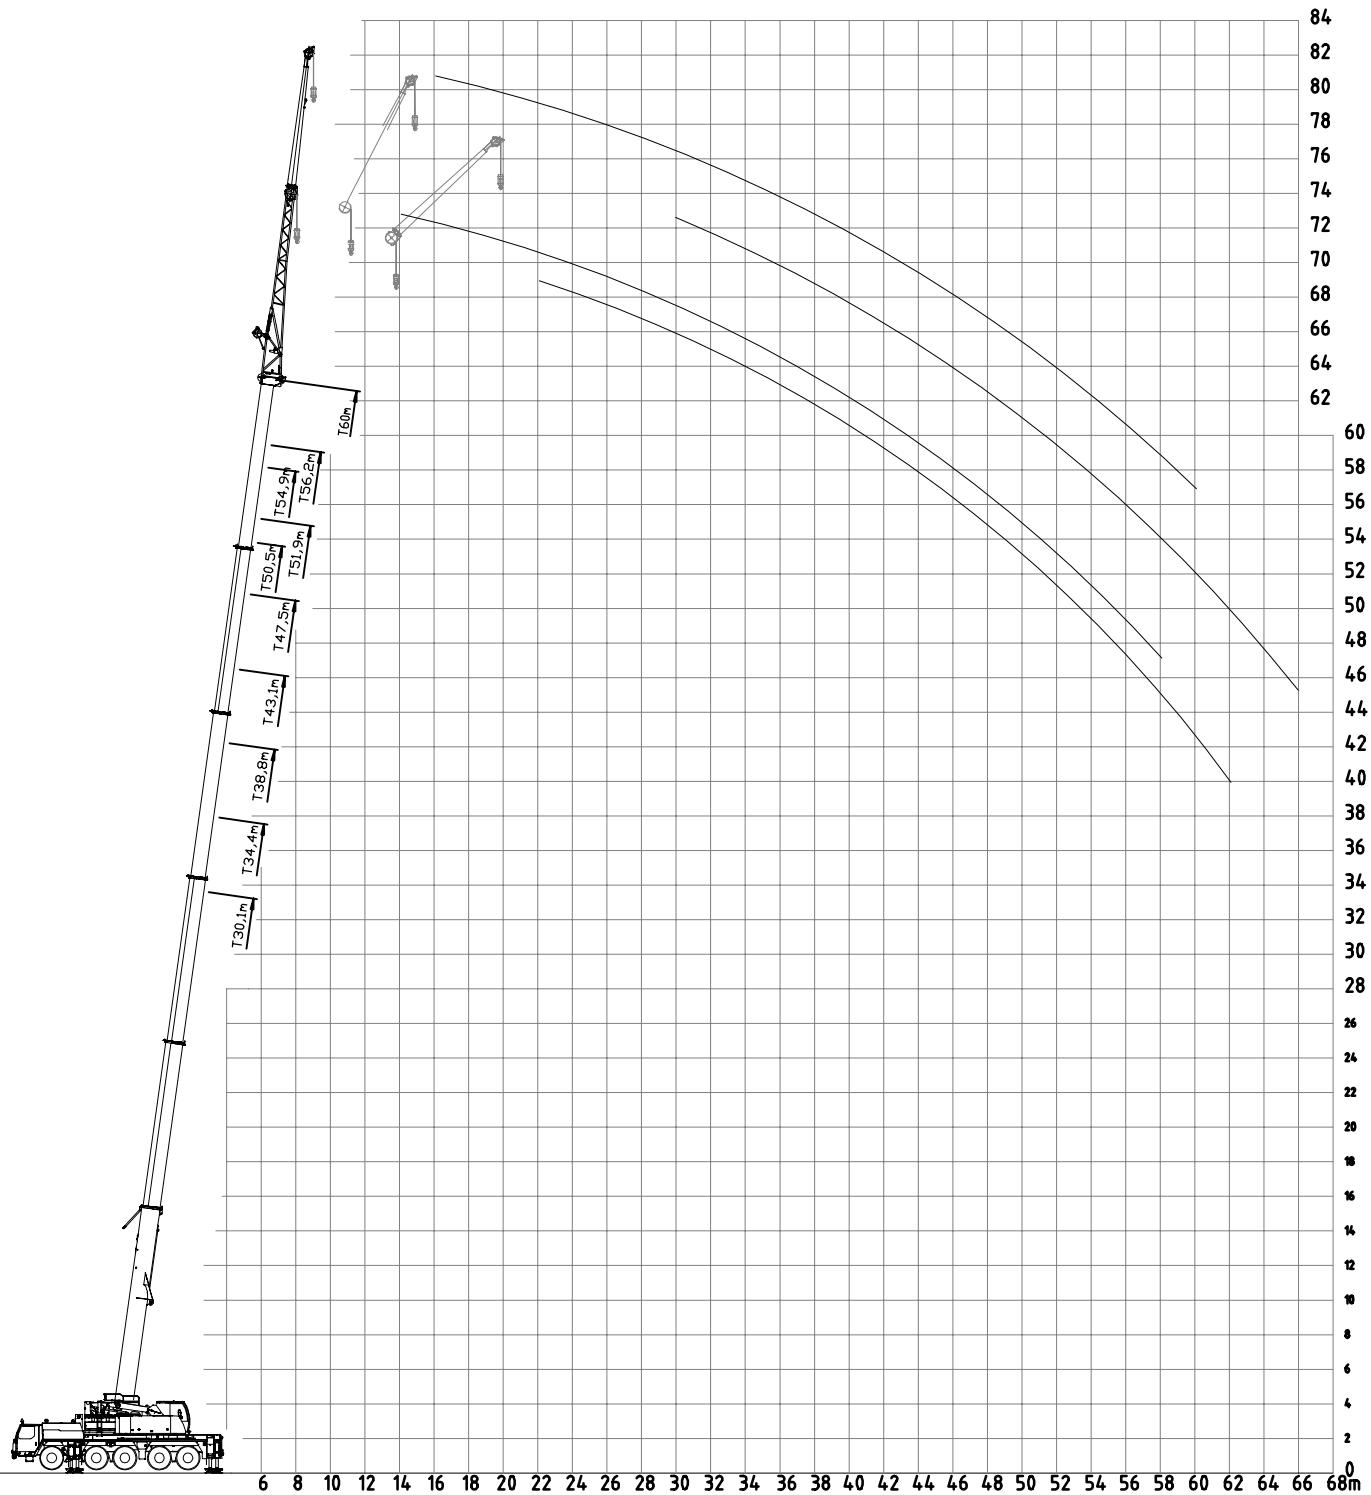

VERTICAAL TRANSPORT  
NEDERLAND B.V.

## HIJSTABEL - 160 TON met 10.8m hulpgiek

Kraan afgestempeld, Stempelbasis: 8.0 x 7.5 m 360° Werkbereik,  
42 ton contra-gewicht

Vlucht radius meters	Giek lengte in meters																
	50.5			51.9			54.9			56.2			60				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
10	7.4			8.2												10	
11	7.4			8.2			6.5			6.7						11	
12	7.4			8.2			6.5			6.7			5.6			12	
14	7.4	7.4		8.2	8.2		6.5			6.7			5.6			14	
16	7.4	7.2		8.2	8.2		6.5	6.5		6.7	6.7		5.6			16	
18	7.1	6.9	6.6	8.1	8.2	7.6	6.4	6.5		6.7	6.7		5.6	5.6		18	
20	6.8	6.6	6.3	7.9	8	7.5	6.1	6.3	6.1	6.6	6.5	6.4	5.6	5.6	5.4	20	
22	6.4	6.2	6.1	7.7	7.6	7.4	5.9	6	5.9	6.4	6.3	6.2	5.5	5.4	5.4	22	
24	6.1	5.9	5.8	7.3	7.1	7.1	5.6	5.7	5.6	6.2	6	6	5.3	5.3	5.3	24	
26	5.7	5.6	5.5	6.9	6.8	6.7	5.3	5.4	5.4	5.9	5.8	5.7	5.2	5.1	5.1	26	
28	5.3	5.3	5.2	6.5	6.4	6.3	5.3	5.2	5.1	5.6	5.5	5.5	4.9	4.9	4.9	28	
30	5	5	5	6.1	6	6	5	4.9	4.9	5.3	5.2	5.2	4.7	4.7	4.7	30	
32	4.6	4.7	4.7	5.7	5.7	5.7	4.7	4.7	4.7	5	5	5	4.5	4.5	4.5	32	
34	4.3	4.4	4.4	5.4	5.3	5.4	4.4	4.4	4.4	4.7	4.7	4.7	4.2	4.3	4.3	34	
36	4	4	4.1	5	5	5.1	4.1	4.1	4.2	4.5	4.4	4.5	4	4	4.1	36	
38	3.7	3.8	3.8	4.7	4.7	4.8	3.9	3.9	3.9	4.2	4.2	4.2	3.7	3.8	3.9	38	
40	3.5	3.5	3.6	4.4	4.4	4.5	3.6	3.7	3.7	4	4	4	3.4	3.6	3.7	40	
42	3.2	3.3	3.4	4.1	4.1	4.2	3.4	3.5	3.5	3.7	3.7	3.8	3.2	3.3	3.4	42	
44	3	3.1	3.1	3.7	3.8	3.9	3.2	3.3	3.3	3.5	3.5	3.6	3	3.1	3.2	44	
46	2.8	2.9	2.9	3.3	3.5	3.6	3	3.1	3.1	3.3	3.3	3.4	2.8	2.9	3	46	
48	2.7	2.7	2.8	3.1	3.2	3.2	2.9	2.9	3	3	3.1	3.2	2.7	2.7	2.8	48	
50	2.5	2.5	2.6	3	3	3	2.7	2.8	2.8	2.7	2.9	3	2.5	2.6	2.6	50	
52	2.4	2.4	2.4	2.7	2.9	2.9	2.6	2.6	2.6	2.3	2.5	2.6	2.3	2.4	2.4	52	
54	2.2	2.2	2.2	2.4	2.6	2.6	2.4	2.5	2.5	2	2.2	2.2	2	2.1	2.2	54	
56	2.1	2.1		2.1	2.2		2.1	2.3	2.3	1.7	1.9	1.9	1.7	1.8	1.9	56	
58	2	2		1.9	1.9		1.9	2	2	1.5	1.6	1.6	1.4	1.5	1.6	58	
60							1.6	1.7		1.2	1.3		1.2	1.3	1.3	60	
62										1	1.1		0.9	1	1	62	
64													0.8			64	


## HIJSTABEL - 160 TON met 19m hulpgiek

Kraan afgestempeld, Stempelbasis: 8.0 x 7.5 m 360° Werkbereik,  
42 ton contra-gewicht

Vlucht radius meters	Giek lengte in meters																
	50.5			51.9			54.9			56.2			60				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
11	4.1			4.4												11	
12	4.1			4.4			3.8			3.9						12	
14	4.1			4.3			3.8			3.9			3.5			14	
16	4			4.2			3.8			3.8			3.5			16	
18	3.9	3.5		4.2	3.8		3.7			3.8			3.4			18	
20	3.9	3.5		4.1	3.7		3.7	3.5		3.7	3.5		3.4			20	
22	3.8	3.5		4	3.6		3.6	3.4		3.7	3.4		3.4	3.2		22	
24	3.7	3.5	3.2	3.9	3.6	3.2	3.6	3.4		3.6	3.4		3.3	3.2		24	
26	3.7	3.4	3.2	3.8	3.5	3.2	3.5	3.3	3.1	3.5	3.3	3.2	3.3	3.2		26	
28	3.6	3.4	3.2	3.7	3.4	3.2	3.5	3.3	3.1	3.5	3.3	3.1	3.3	3.2	3.1	28	
30	3.5	3.3	3.1	3.7	3.4	3.2	3.4	3.3	3.1	3.5	3.3	3.1	3.2	3.1	3.1	30	
32	3.5	3.3	3.1	3.6	3.3	3.2	3.4	3.2	3.1	3.4	3.2	3.1	3.2	3.1	3.1	32	
34	3.4	3.2	3.1	3.5	3.3	3.1	3.3	3.2	3.1	3.4	3.2	3.1	3.2	3.1	3.1	34	
36	3.3	3.2	3.1	3.5	3.3	3.1	3.3	3.2	3.1	3.3	3.2	3.1	3.1	3.1	3.1	36	
38	3.2	3.2	3.1	3.4	3.2	3.1	3.2	3.1	3.1	3.2	3.2	3.1	3.1	3	3.1	38	
40	3.1	3.1	3.1	3.4	3.2	3.1	3.1	3.1	3.1	3.2	3.1	3.1	3	3	3	40	
42	2.9	3	3	3.3	3.2	3.1	3	3	3.1	3.1	3.1	3.1	2.9	3	3	42	
44	2.8	2.9	3	3.2	3.2	3.1	2.9	2.9	3	3	3	3.1	2.8	2.9	2.9	44	
46	2.6	2.7	2.9	3.1	3.1	3.1	2.7	2.8	2.9	2.9	2.9	3	2.6	2.8	2.9	46	
48	2.5	2.6	2.7	3	3	3.1	2.6	2.7	2.8	2.8	2.8	2.9	2.5	2.6	2.7	48	
50	2.3	2.4	2.5	2.9	2.9	3	2.5	2.6	2.7	2.7	2.7	2.8	2.3	2.5	2.6	50	
52	2.2	2.3	2.4	2.5	2.8	2.9	2.3	2.4	2.5	2.5	2.6	2.7	2.2	2.4	2.5	52	
54	2.1	2.2	2.2	2.4	2.5	2.7	2.2	2.3	2.4	2.3	2.5	2.6	2.1	2.2	2.3	54	
56	1.9	2	2.1	2.3	2.3	2.4	2.1	2.2	2.2	2	2.4	2.5	1.9	2.1	2.2	56	
58	1.8	1.9	1.9	2.2	2.2	2.3	2	2.1	2.1	1.8	2.1	2.2	1.7	1.9	2	58	
60	1.7	1.8	1.8	1.9	2.1	2.2	1.9	1.9	2	1.5	1.8	1.9	1.4	1.7	1.9	60	
62	1.6	1.7	1.7	1.7	1.9	1.9	1.7	1.8	1.9	1.3	1.5	1.6	1.2	1.5	1.6	62	
64	1.5	1.6		1.5	1.6		1.4	1.6	1.6	1.1	1.3	1.3	1	1.2	1.3	64	
66				1.3			1.2	1.4	1.4	0.9	1	1	0.8	1	1.1	66	
68							1.1	1.2		0.8			0.8	0.8		68	

# Kraan 160 TON

Vlucht tabel met  
tele-verlenging en hulpgiek

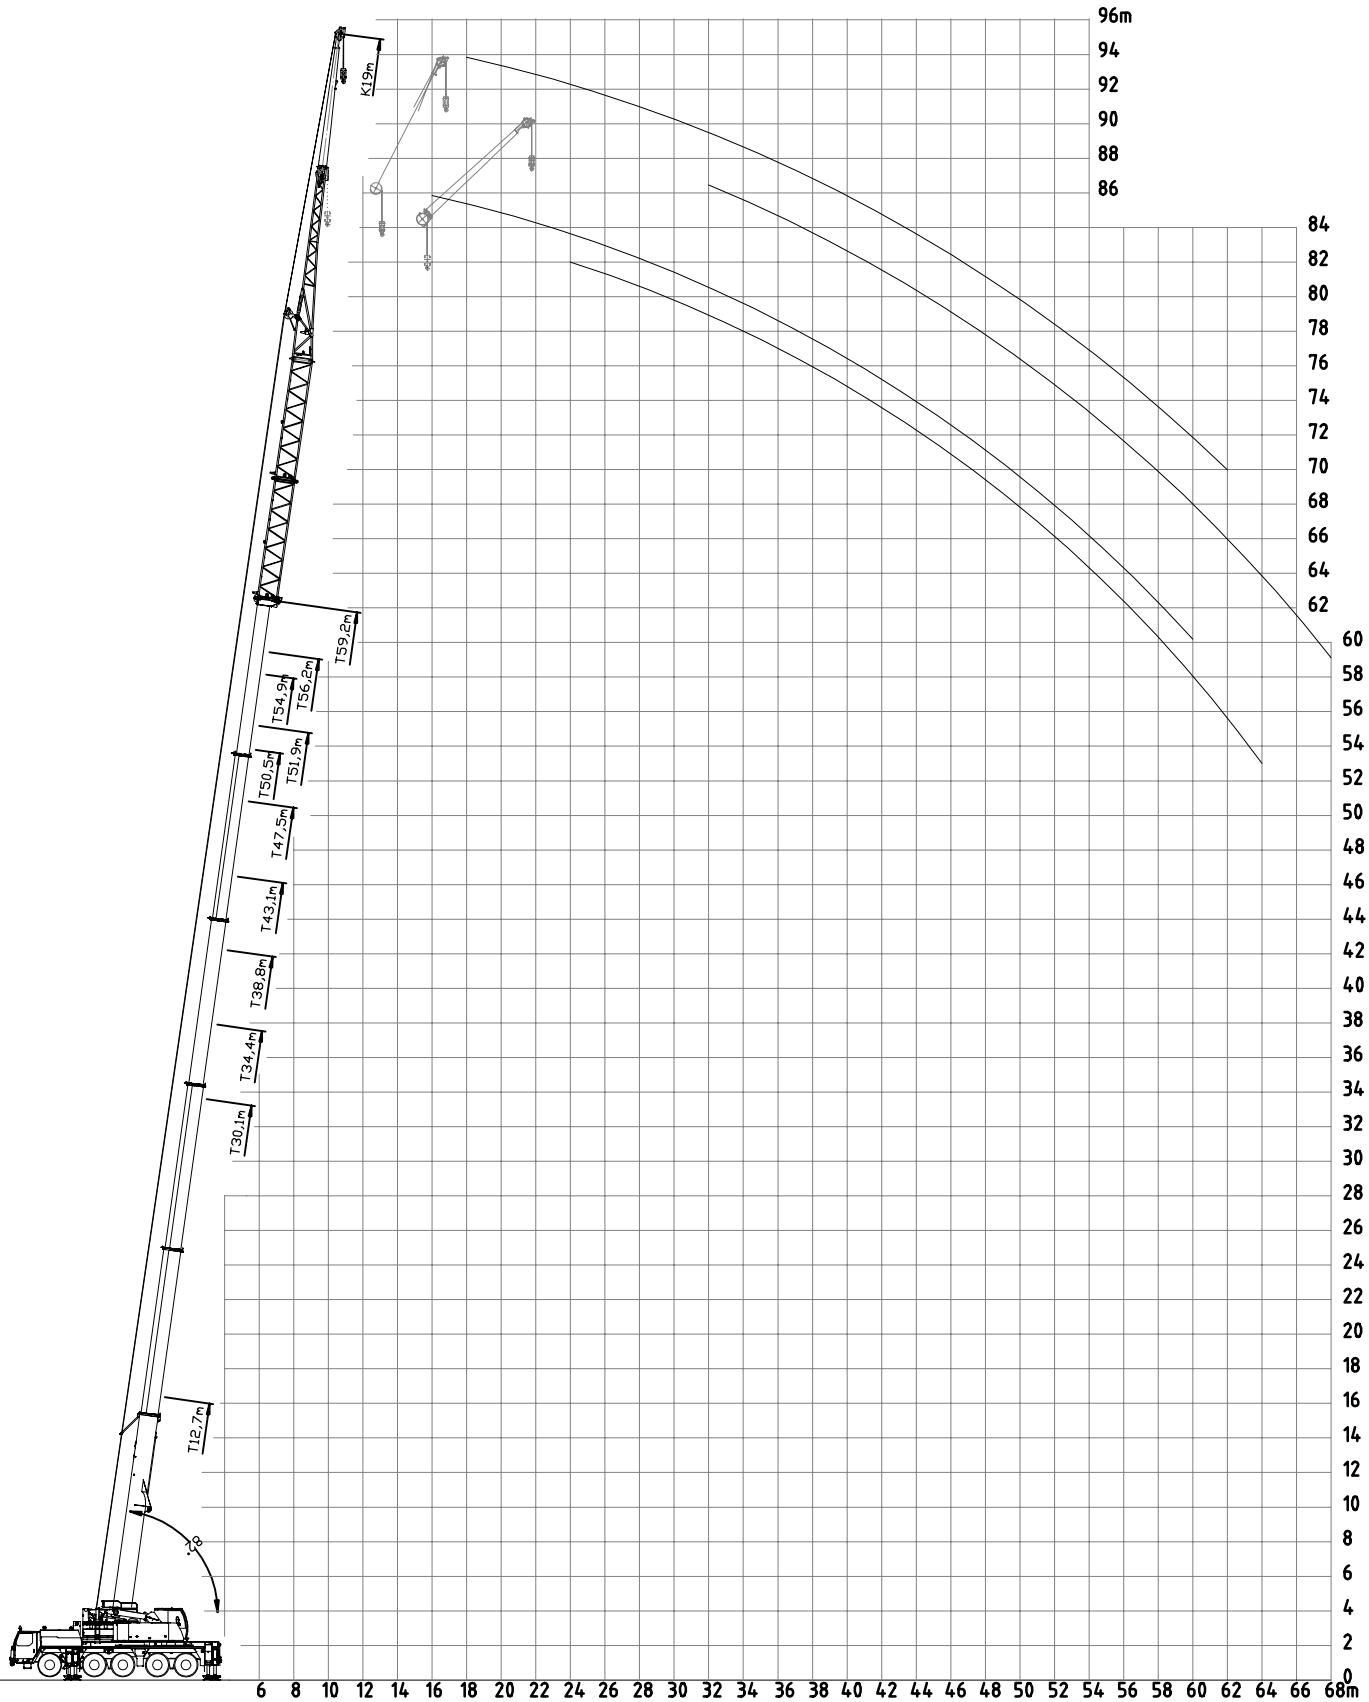

VERTICAAL TRANSPORT  
NEDERLAND B.V.

**HIJSTABEL - 160 TON met tele -verlenging(7/14m)  
en 10.8m hulpgiek**

Kraan afgestempeld, Stempelbasis: 8.0 x 7.5 m 360° Werkbereik,  
42 ton contra-gewicht

Vlucht radius meters	Giek lengte in meters																
	54.9+7			56.2+7			60+7			56.2+14			59.2+14				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
12	4.4			4.6													
14	4.4			4.6			3.9			3.1						14	
16	4.4			4.6			3.9			3.1			2.7			16	
18	4.4	4.4		4.6	4.6		3.9	3.9		3.1			2.7			18	
20	4.4	4.4	4.2	4.6	4.6	4.4	3.9	3.9		3.1	3.1		2.7	2.7		20	
22	4.4	4.3	4.1	4.5	4.5	4.3	3.9	3.9	3.8	3.1	3.1	3.1	2.7	2.7		22	
24	4.3	4.2	4	4.4	4.3	4.1	3.8	3.9	3.8	3.1	3.1	3.1	2.7	2.7	2.7	24	
26	4.2	4	3.9	4.4	4.2	4	3.8	3.8	3.7	3	3	3	2.7	2.7	2.7	26	
28	4	3.9	3.7	4.3	4	3.9	3.7	3.7	3.6	3	2.9	2.9	2.6	2.7	2.7	28	
30	3.9	3.7	3.6	4.1	3.9	3.8	3.6	3.6	3.5	2.9	2.8	2.8	2.6	2.6	2.6	30	
32	3.7	3.6	3.5	3.9	3.8	3.7	3.5	3.5	3.4	2.8	2.7	2.7	2.6	2.5	2.5	32	
34	3.5	3.5	3.4	3.7	3.6	3.6	3.4	3.4	3.3	2.7	2.6	2.6	2.5	2.4	2.4	34	
36	3.3	3.3	3.3	3.6	3.5	3.5	3.2	3.2	3.2	2.6	2.5	2.5	2.4	2.4	2.3	36	
38	3.2	3.2	3.2	3.4	3.4	3.4	3.1	3.1	3.1	2.5	2.4	2.4	2.4	2.3	2.3	38	
40	3	3.1	3.1	3.2	3.3	3.3	3	3	3	2.4	2.4	2.3	2.3	2.2	2.2	40	
42	2.9	2.9	3	3.1	3.1	3.1	2.8	2.9	2.9	2.4	2.3	2.3	2.2	2.1	2.1	42	
44	2.7	2.8	2.8	2.9	3	3	2.6	2.7	2.8	2.3	2.2	2.2	2.1	2.1	2.1	44	
46	2.6	2.6	2.7	2.8	2.8	2.9	2.5	2.6	2.6	2.2	2.1	2.1	2	2	2	46	
48	2.5	2.5	2.6	2.7	2.7	2.7	2.3	2.4	2.5	2.1	2.1	2.1	1.9	1.9	1.9	48	
50	2.3	2.4	2.4	2.5	2.6	2.6	2.2	2.3	2.3	2	2	2	1.9	1.9	1.9	50	
52	2.2	2.2	2.3	2.3	2.4	2.5	2.1	2.1	2.2	1.9	1.9	2	1.8	1.8	1.8	52	
54	2.1	2.1	2.1	2	2.2	2.3	1.9	2	2	1.8	1.9	1.9	1.7	1.7	1.8	54	
56	1.9	2	2	1.7	1.9	2	1.6	1.8	1.9	1.6	1.8	1.8	1.6	1.6	1.7	56	
58	1.8	1.9	1.9	1.4	1.6	1.7	1.3	1.5	1.6	1.3	1.5	1.6	1.3	1.5	1.6	58	
60	1.6	1.7	1.7	1.2	1.3	1.4	1.1	1.3	1.3	1.1	1.3	1.4	1.1	1.2	1.3	60	
62	1.3	1.4	1.5	0.9	1.1	1.1	0.9	1	1.1	0.9	1	1.1	0.8	1	1.1	62	
64	1.1	1.2	1.2		0.8	0.8		0.8	0.8		0.8	0.8			0.8	64	
66	0.9	1														66	
68		0.8														68	

**HIJSTABEL - 160 TON met tele -verlenging(7/14m)  
en 19 hulpgiek**

Kraan afgestempeld, Stempelbasis: 8.0 x 7.5 m 360° Werkbereik,  
42 ton contra-gewicht

Vlucht radius meters	Giek lengte in meters																
	54.9+7			56.2+7			59.2+7			56.2+14			59.2+14				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°		
12																	
14	3			3.1												14	
16	3			3.1			2.7			2.1						16	
18	3			3.1			2.7			2.1			1.8			18	
20	3			3.1			2.7			2.1			1.8			20	
22	3	2.9		3.1	3		2.7			2.1			1.8			22	
24	3	2.9		3	3		2.7	2.6		2.1	2.1		1.8			24	
26	3	2.9		3	3		2.7	2.6		2.1	2.1		1.8	1.8		26	
28	3	2.8	2.7	3	2.9	2.8	2.7	2.6		2.1	2.1		1.8	1.8		28	
30	2.9	2.7	2.6	3	2.8	2.7	2.7	2.6	2.5	2	2.1	2.1	1.8	1.8		30	
32	2.9	2.7	2.6	2.9	2.8	2.6	2.7	2.6	2.5	2	2	2	1.8	1.8	1.8	32	
34	2.8	2.6	2.5	2.9	2.7	2.6	2.6	2.5	2.4	2	2	2	1.8	1.8	1.8	34	
36	2.7	2.5	2.4	2.8	2.6	2.5	2.6	2.4	2.4	2	1.9	1.9	1.8	1.8	1.8	36	
38	2.6	2.4	2.3	2.7	2.5	2.4	2.5	2.4	2.3	1.9	1.9	1.8	1.7	1.7	1.7	38	
40	2.5	2.3	2.3	2.6	2.4	2.4	2.4	2.3	2.3	1.9	1.8	1.8	1.7	1.7	1.7	40	
42	2.4	2.3	2.2	2.5	2.4	2.3	2.4	2.2	2.2	1.8	1.7	1.7	1.6	1.6	1.6	42	
44	2.3	2.2	2.2	2.4	2.3	2.3	2.3	2.2	2.2	1.7	1.7	1.6	1.6	1.6	1.5	44	
46	2.2	2.2	2.1	2.4	2.2	2.2	2.2	2.1	2.1	1.7	1.6	1.6	1.5	1.5	1.5	46	
48	2.2	2.1	2.1	2.3	2.2	2.2	2.1	2.1	2.1	1.6	1.5	1.5	1.5	1.5	1.5	48	
50	2.1	2	2	2.2	2.1	2.1	2	2	2	1.6	1.5	1.5	1.5	1.4	1.4	50	
52	2	2	2	2.1	2.1	2.1	1.9	2	2	1.5	1.4	1.4	1.4	1.4	1.4	52	
54	1.9	1.9	2	2	2	2	1.9	1.9	1.9	1.4	1.4	1.4	1.4	1.3	1.3	54	
56	1.8	1.8	1.9	1.9	1.9	2	1.8	1.8	1.9	1.4	1.4	1.4	1.3	1.3	1.3	56	
58	1.6	1.7	1.8	1.7	1.9	1.9	1.6	1.8	1.8	1.3	1.3	1.3	1.3	1.2	1.3	58	
60	1.6	1.6	1.7	1.4	1.7	1.8	1.4	1.7	1.7	1.3	1.3	1.3	1.2	1.2	1.2	60	
62	1.5	1.5	1.6	1.2	1.5	1.6	1.1	1.5	1.6	1.1	1.2	1.2	1	1.2	1.2	62	
64	1.3	1.4	1.5	1	1.2	1.4	0.9	1.2	1.4	0.8	1.2	1.2	0.8	1.1	1.1	64	
66	1.1	1.3	1.4	0.8	1	1.1		1	1.1	0.9		1.1		0.9	1.1	66	
68	0.9	1.1	1.2		0.8	0.9		0.8	0.9		0.8			0.8		68	
70		0.9	0.9													70	

# KRAAN 160 TON afmetingen

